

One vision, Two sharp eyes with Our Innovation

TMS-4N

Topographic Modeling System



- USB Connection
- Auto Shot Function
- Large Patient Database
- Easy Database Operation
- Multi-Language Operation
- Fourier Refractive Analysis
- Quick Data Reference
- Built-in LCD Alignment
- Keratoconus Screening & Other Applications

TMS-4N SPECIFICATIONS

Measurement

Measurement type	Ring cone
Ring numbers	25
Measurement points	6,400 maximum
Measurement points on a ring	256
Minimum / Maximum ring diameter	Ø 0.46 to 8.8 mm (43D)
Spherical measurement range	5.5 to 10.0 mm (61.36 to 33.75 D)
Spherical measurement accuracy	±0.02 mm (Spherical)
Alignment	Manual with auto-correction

< CL option only >

Ring numbers	31
Measurement points	7,300 maximum
Measurement points on a ring	256
Minimum / Maximum ring diameter	Ø 0.57 to 10.9 mm (43D)
Spherical measurement range	5.5 to 10.0 mm (61.36 to 33.75 D)
Spherical measurement accuracy	±0.02 mm (Spherical)

System Requirements

Operating System	Windows® 7, Windows® 8
CPU	Intel® Core™2 Duo processor or higher
Memory	More than 512 MB
Interface	USB 2.0 (Connection with a main unit)
Display (Resolution)	800 x 600 or higher

Main unit

Display	5.7 inch color LCD
Dimensions	296(W) x 508(L) x 448(H) mm
Weight	14 kg
Power Supply	AC 100 to 240V, 50 / 60 Hz 45 to 55 VA

One vision, Two sharp eyes with Our Innovation

TMS-4N

A Decade of Achievement

Topographic Modeling System



- USB Connection
- Auto Shot Function
- Large Patient Database
- Easy Database Operation
- Multi-Language Operation
- Fourier Refractive Analysis
- Quick Data Reference
- Built-in LCD Alignment
- Keratoconus Screening & Other Applications



Tomey Corporation [Asia-Pacific]

2-11-33 Noritakeshinmachi
Nishi-Ku, Nagoya, 451-0051, Japan
Tel: ++81-52-581-5327
Fax: ++81-52-561-4735
E-Mail: intl@tomey.co.jp

Tomey GmbH [Europe]

Am Weichselgarten 19a
91058 Erlangen, Germany
Tel: ++49-9131-77710
Fax: ++49-9131-777120
E-Mail: info@tomey.de

For more information, visit our web site <http://www.tomey.com>

©2014 Tomey Corporation. Specifications are subject to change without notice. Any products mentioned herein are registered trademarks of their respective owners.

140901



One vision, Two sharp eyes with Our Innovation

TMS-4N

Topographic Modeling System

Famous, Traditional, Reliable Topographer

Corneal Topographer Continues to Set the Standard for Resolution, Accuracy & Corneal Coverage.

TMS-4N has the comprehensive software: Single, Dual, Multiple and you can even customize your own map with favorite scale, map type and so on. Fourier Analysis provides you the refractive information with Spherical Equivalent, Regular Astigmatism, Asymmetry and Higher order irregularity. Fourier Analysis provides the refractive information with 3mm and 6mm diameter range. The software applications, Klyce Statistics, Keratoconus Screening, Enhanced Height and Height Change Maps are also available.



Placido Light Cone

Data Listing As You Like !!
Name by Name or Folder by Folder Data Listing!!

Last Name	First Name	Patient ID
Tomey	Sample	001
Tomey	Sample	002
Tomey	Sample	003
Tomey	Sample	004
Tomey	Sample	006
Tomey	Sample	007
Tomey	Sample	008
Tomey	Sample	009
Tomey	Sample	010
Tomey	Sample	011
Tomey	Sample	012
Tomey	Sample	013
Tomey	Sample	014
Tomey	Sample	015
Tomey	Sample	016

All former TMS data available to import !!
Even TMS-1 Exams can be imported into new system!!

2Win
OD
DateTime: 1998/05/13 15:53:54
Cone: 34
FileName: 101.TMS
Path: C:\Tomey\Tms\NewExams\

English
Japanese
Italian
German
French
Spanish Euro
Spanish L.A.
Chinese
Portuguese
Custom

9+1 multi language menu !!
Popular languages all over the world!


Operated by Icons !!
Visual Operation by Icons

KC X2 X4
C1 C2


One Click Data Review !!
To review Stats Data, just click an exam & highlight it!!

Stats	Exam Refraction	Clinic Name	Note
R: 7.58 @ 97° K: 7.77 @ 177° MFK: 7.78 @ 9° AvgK: 7.67 CY: 1.12D S: 0.10 PVA: 2915-2920 SA: 0.23	Sph: _____ Cyl: _____ Axis: _____ BCVA: _____	Clinic Label: _____ Machine ID: _____ Diagnosis: _____ Group: _____ Operator: _____	<input type="text"/> <input type="button" value="Save"/> <input type="button" value="Cancel"/>


Advanced Database Query !!
Query data by machines, Stats data, patient data...many options available.

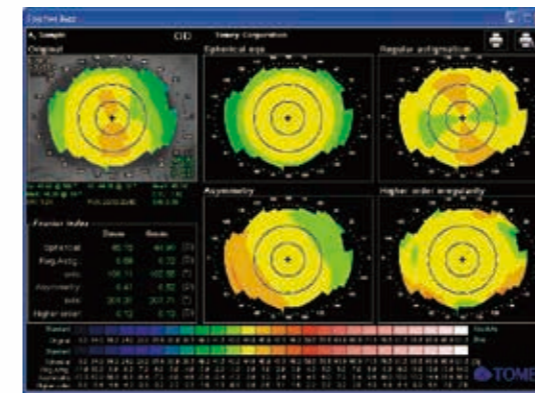


Fourier Analysis

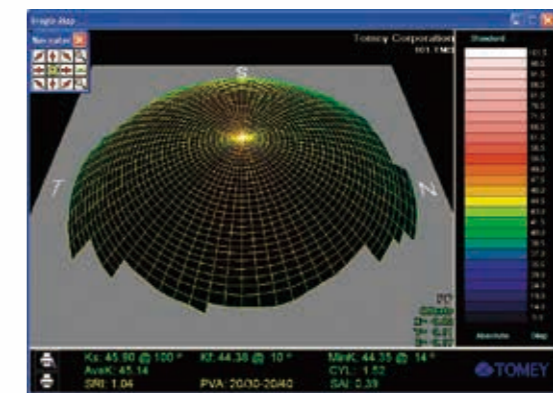

3D Corneal Map

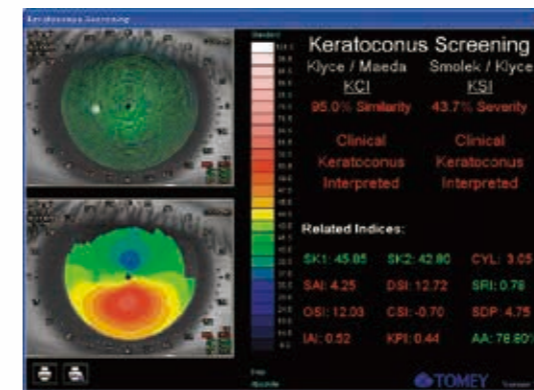

Keratoconus Screening

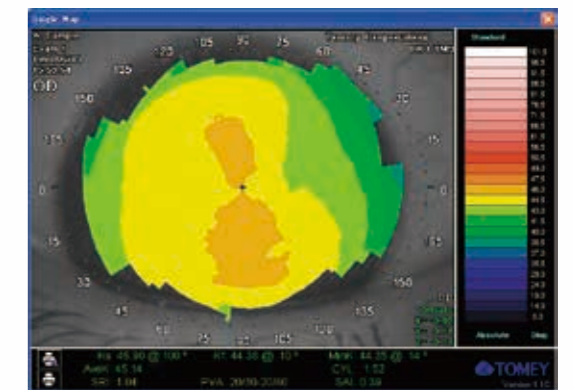

Single Corneal Map

Statistical Indices

Simulated K, Minimum K, Average Corneal Power, Potential Visual Acuity, Surface Regularity Index, Surface Asymmetry Index, Corneal Eccentricity Index, Irregular Astigmatism Index, Standard Deviation of Corneal Power, Analyzed Area, Elevation/Depression Power, Elevation/Depression Diameter, Simulated Keratometric Cylinder Change.

Contact Lens Software (Option)

User-defined Fitting Strategies, User-defined Lens Designs, Simulated Fluorescein Patterns, Sagittal Tear Film Plots, Adjustment of Position, Rotation and Tilt, User Modifiable Data Base, Order Form Printout, Automatic Transmission of Data to Optical Lab.

TMS-1 features come back with better resolution, accuracy and easy operation. TOMEY's patented light cones use 25 or 31 rings (same as TMS-1), providing high resolution.

The laser alignment system provides high accuracy and repeatability.

The small cone design eliminates nose & brow shadow and provides extensive corneal coverage.

The low light level of the rings promotes patient comfort.